


Vault Structures Inc. — TL 30 Safes



*Vaulting
Security
Solutions
to a New Level*

Tel: 800 226 3990

- TOP FEATURES**
- Composite Door
 - Special VSI Locking Design
 - Special VSI Hinge Design
 - Industrial Textured Finish
 - UL Listed

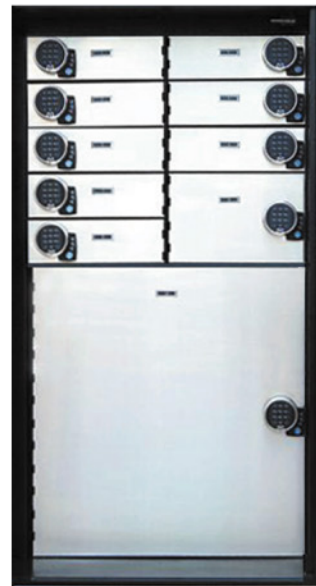

Made in America

Manufacturer reserves the right to change product specifications without notice.

Vault Structures, the "Safe" Choice

Versatility

Standard safes range in size from 26" high to 74" high. Special sizes are available to meet any customer needs. Options include special VSI locking configurations, adjustable or fixed shelves, decorative panels, depository configurations and special interiors. Standard colors are beige, black and tan. Special colors are available to match submitted paint samples.

Secure Construction

The TL30 from VSI is Underwriters Laboratory listed. TL30 safes are constructed of 1" steel, with a composite door using VSI Hercvlite materials, group 2 combination locks are standard.

Installation

Safes are shipped crated and normally require professional installation. Safes weighing less than 750 lbs. must be fastened to the floor.

TL30

Standard safe selections with KL combination lock

Model

No.	Outside Dimensions	Clear Inside Dimensions	Wt.
2626	26" H x 26" W x 24" D	21.75" H x 21.875" W x 16.5" D	1050
3030	30" H x 30" W x 24" D	25.75" H x 25.875" W x 16.5" D	1345
3636	36" H x 36" W x 24" D	31.75" H x 31.875" W x 16.5" D	1665
4040	40" H x 40" W x 24" D	35.75" H x 33.875" W x 16.5" D	1890
7438	74" H x 38" W x 33" D	69.75" H x 33.876" W x 25.5" D	3670

For safes requiring interiors allow a 7.5" setback to clear lock and depth of door.

For door swing of 90° safe with interior must be a minimum of 39" wide. For 120° or greater door swing, the door must be a minimum of 38" wide. For 180° door swing, the door must be a minimum of 36" wide.

Versatility, Security & Dependability

VSI's standard or custom TL30 safes meet any configuration needed!!!

TL - 30 SAFE

HOW TO FIGURE CLEAR INSIDE DIMENSIONS:

OUTSIDE HEIGHT (- 2 1/4") = INSIDE CLEAR HEIGHT*

OUTSIDE WIDTH (- 3 1/2") + INSIDE CLEAR WIDTH

OUTSIDE DEPTH - SEE SKETCH = INSIDE CLEAR DEPTH

* ALLOW 2" ADDITIONAL CLEARANCE IF ALARM DEVICE REQUIRED

EXAMPLE 1: 36" H X 38W X 33 D

36" HEIGHT OUTSIDE: 36" (-2 1/4) = 34 1/2" INSIDE CLEAR HEIGHT

38" WIDE OUTSIDE: 38" (-3 1/2") = 34 1/2" INSIDE CLEAR WIDTH

33" DEPTH OUTSIDE: (-7 1/2") = 25 1/2" INSIDE CLEAR DEPTH

NOTE: IF THE INSTALLATION HAS LIMITED DOOR SWING, USE THE PROPER CLEAR OPENING FOR DOOR SWING


NOTES:

H = HEIGHT

W = WIDTH

D = DEPTH

W/D = WALL CLEARANCE

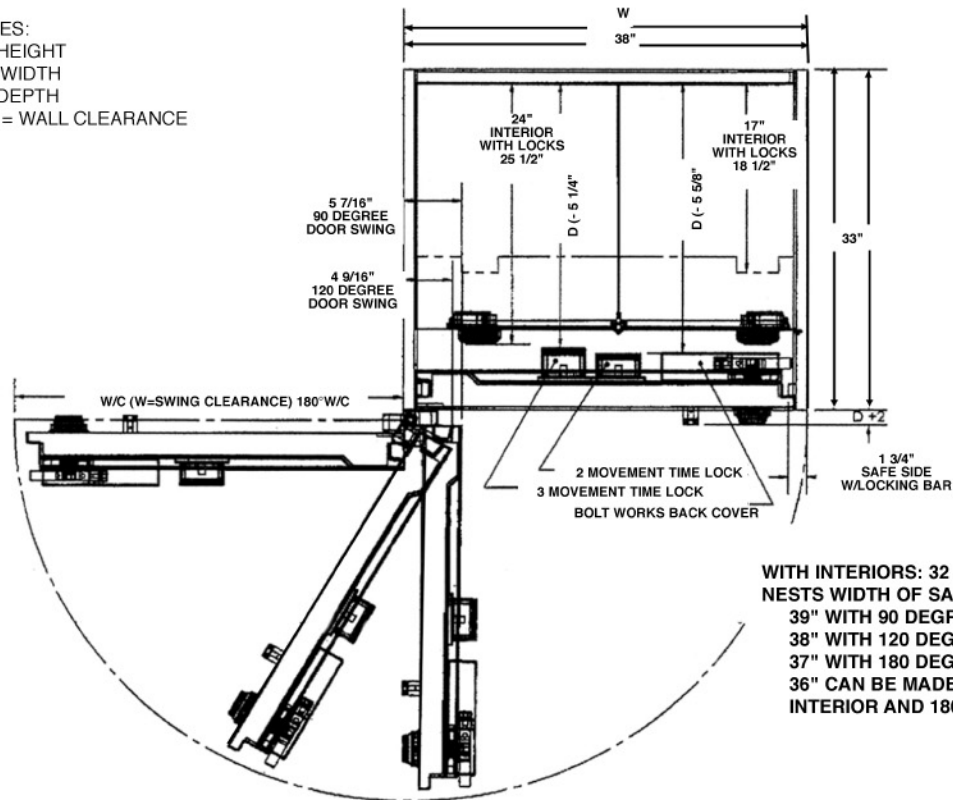

WITH INTERIORS: 32 5/8"W (SDB/LOCKER)
NESTS WIDTH OF SAFE TO BE:
39" WITH 90 DEGREE DOOR SWING
38" WITH 120 DEGREE DPPR SWING
37" WITH 180 DEGREE DOOR SWING
36" CAN BE MADE WITH BUILT-IN
INTERIOR AND 180 DEGREE DOOR SWING



Vault Structures, Inc
3640 Work Drive
Fort Myers, FL 33916
800 226 3990
sales@vaultstructures.com